


# PROBES

## 4-ARM DIPMETER

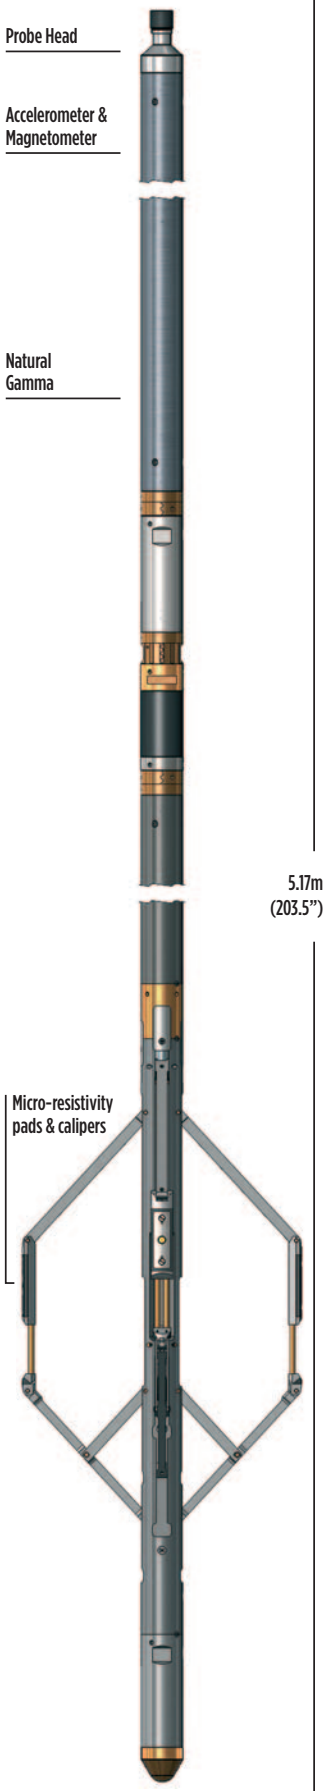

4-Arm Dipmeter Probe

The 4-Arm Dipmeter measures microresistivity and tool orientation data.

These can be processed to determine formation dips.

### Principle of Measurement:

The probe consists of a microresistivity section and a detachable verticality module. Microresistivity data is acquired by four high-resolution, button electrodes mounted on motorised XY caliper arms and maintained in contact with the borehole walls. A planar formation feature that does not lie perpendicular to the borehole axis is detected by each electrode at a different apparent depth. The four microresistivity measurements are correlated and combined with the verticality data to calculate the dip and dip direction.

## SPECIFICATION:

### Features

- Small diameter for slim-hole operations
- Operates in all orientations

### Measurements

- Formation dip and azimuth
- Microresistivity
- Borehole verticality and drift
- True vertical depth
- Borehole volume
- Natural Gamma

### Applications

- Engineering/minerals
- Stratigraphy
- Sedimentology
- Identification of faults and folding
- Fracture identification
- Correlation between wells

### Operating Conditions


- Borehole type: open, water-filled
- Centralisation: non-magnetic centralisers required for inclined boreholes and/or diameters above 150mm
- Recommended Logging Speed: 3m/min

### Specifications

- Diameter: 61mm (when closed 66mm)
- Length: 5.17m
- Weight: 52kg (combined)
- Temperature: 0-70°C (extended ranges available)
- Max. pressure: 20MPa
- Resistivity range: 1 to 10,000 ohm-m
- Borehole inclination: any
- Caliper range: 62-380mm

### Part Numbers

- 1002171 4-Arm Dipmeter probe with natural gamma

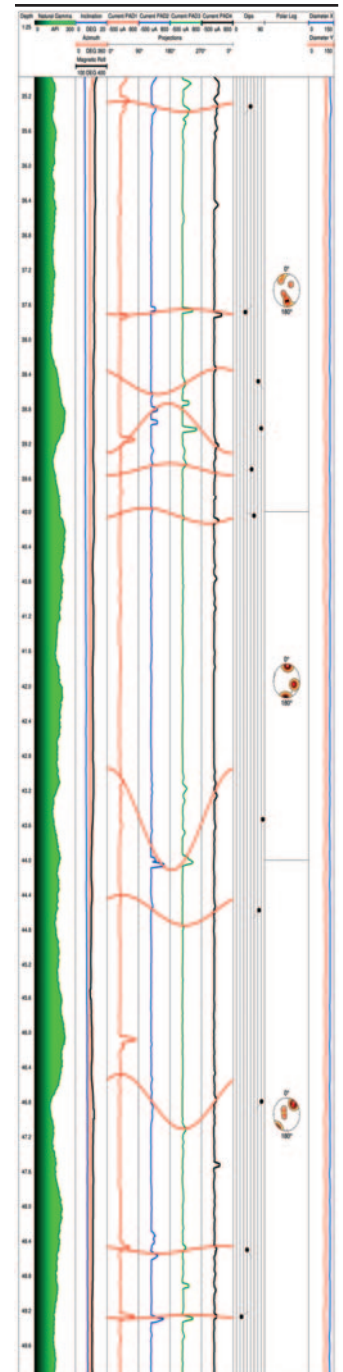

Example of logging data

[▶ CLICK HERE FOR ENQUIRY FORM](#)